FlexRite[™] AD2 Anti-Fatigue Drainage Mat

Designed for areas where grease, oil and chemicals are present
Location: Indoor, Outdoor, Metal Grating, Platform, Walkway, Workstation
Environment: Dry, Wet, Oily, Slippery

• INTERLOCKING | Use to connect multiple mats together.

modular tiles & ramps to build the coverage you need

chemical resistance; welding safe; UV resistant

Applied for NFSI certification

still or walking across the mat

equivalent chemistry

FLEXIBLE DESIGN

Use to connect to our state-of-the-art MT2 modular tile & ramp systems

• VERSATILE | Easy installation, reconfiguration, mix with interlocking

DURABLE | Heavy duty, cutting fluid, grease & oil proof; tough abrasion &


DRAINAGE | Large drainage holes surrounded with a raised pattern allows liquid, air & light to flow through while keeping debris from work area
 SAFE | Slip-resistant high coefficient of friction materials & design

COMFORTABLE | Compression (soft rubber compound) and deflection (underside design pattern) work together to give maximum comfort standing

■ COMPOUND | ReviveRite[™] high quality 100% recycled nitrile rubber

tile system for unlimited customization with standard out of the box parts.

AD2 is heavy duty and durable. Made from ReviveRite[™] compound that is designed to stand up to harsh chemicals while maintaining a high traction surface. Modular in design allows the 3 base sizes to connect on all sides to build a floor any size. With our innovative connection system, you can tie AD2 into our MT2 modular interlocking

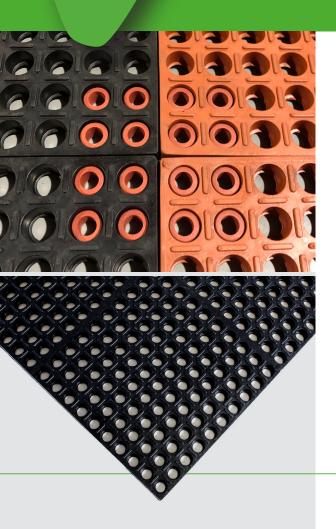







FlexRite[™] AD2 Anti-Fatigue Drainage Mat



AD2.78x4x4.CT.TC



MT2.78x4x18.CT.BK

WHAT IS REVIVERITE Inside! ?

All FlexRite[™] mats and interlocking tiles are molded using 100% post-consumer and post-industrial polymers recycled in an environmentally friendly way in our vertically integrated facilities. The ReviveRite[™] process uses food and medicine grade additives to restore the original technical capabilities of various post-use polymers without the harmful side effects of foreign rubber reclaiming process. We produce superior cost-performance compounds that translate into higher-polymer-content, and as such, higher quality molded products as compared to products derived from virgin polymers.

AD2 7/8" ANTI-FATIGUE STRAIGHT EDGE DRAINAGE			
Part Number	Color	Size*	Weight
AD2.78x24x36.SE.BK	Black	2'x 3'	16 lbs.
AD2.78x24x36.SE.TC	Terracotta	2'x 3'	16 lbs.
AD2.78x36x36.SE.BK	Black	3'x 3'	23 lbs.
AD2.78x36x36.SE.TC	Terracotta	3'x 3'	23 lbs.
AD2.78x36x60.SE.BK	Black	3'x 5'	38 lbs.
AD2.78x36x60.SE.TC	Terracotta	3'x 5'	38 lbs.
AD2.78x4x4.CT.BK	MTM Connector	4"x 4"	0.5 lbs.
MT2.78x4x18.CT.BK	MTT Connector	4"x 18"	0.5 lbs.
Cinco and an unavitation			


* Sizes are approximate











AD2-2207R2306